

TECHNICAL DATA SHEET - CONCRETE ZIG-ZAG SPACER

DESCRIPTION

Concrete Zig-Zag spacer is suitable for horizontal reinforcement and especially for rolling reinforcement.

The Zig-Zag spacer has a 2.5 mm galvanized wire embedded.

The narrow rounded edge can advantageously be turned downwards by casting visible concrete.

The wide edge is turned downwards by molding on a soft surface, eg insulation.


Concrete strength: > 60 N/mm²



For mix design requirements, use Concrete Zig-Zag in mix StQ3 + see more information here: <https://haucon.dk/produkt/beton-zig-zag-stq3/>

GEOMETRY

Item no.	Description	Length (L) mm	Height (H) mm
1131090	Beton Zig-Zag 25	800	25
1131095	Beton Zig-Zag 30	800	30
1131100	Beton Zig-Zag 35	800	35
1131105	Beton Zig-Zag 40	800	40
1131106	Beton Zig-Zag 45	800	45
1131110	Beton Zig-Zag 50	800	50
1131111	Beton Zig-Zag 55	800	55
1131115	Beton Zig-Zag 60	800	60
1131118*	Beton Zig-Zag 70	800	70
1131120*	Beton Zig-Zag 75	800	75
1131121*	Beton Zig-Zag 80	800	80
1131122*	Beton Zig-Zag 90	800	90
1131123*	Beton Zig-Zag 100	800	100

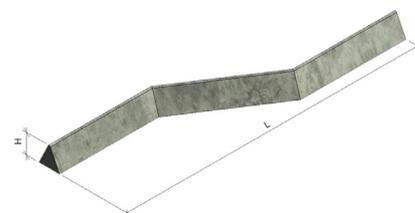

Remark:

*Not in stock

All designs of Concrete Zig-Zag spacers in HauCon's range can be produced in mix design StQ1 or StQ3+. A production time of 4 weeks must be counted for non-stocked types.

CE-MARKING

Concrete Zig-Zag is not subject to a harmonized standard and therefore does not have to be CE marked according to the Building Products Regulation No. 305/2011.

Note: We take reservations for typing errors and refer to the current version of data is always available at www.haucon.dk or can be requested by contacting the expedition. Current revision number is stated at the top left corner.