

TECHNICAL DATA SHEET - CONCRETE ZIG-ZAG SPACER STQ1

DESCRIPTION

Concrete Zig-Zag spacer is suitable for horizontal reinforcement and especially for rolling reinforcement.

The Zig-Zag spacer has a 1,6 mm galvanized wire embedded.

The narrow rounded edge can advantageously be turned downwards by casting visible concrete.

The wide edge is turned downwards by molding on a soft surface, eg insulation.


Concrete strength: > 60 N/mm²



For mix design requirements, use Concrete Zig-Zag in mix StQ3 + see more information here: <https://haucon.dk/forbrugsartikler/afstandshol-dere-til-armering/beton/beton-zig-zag-stq3>

GEOMETRY

Item no.	Description	Length (L) mm	Height (H) mm
1131089*	Beton zig-zag STQ1 20 mm	800	20
1131090	Beton zig-zag STQ1 25 mm	800	25
1131094	Beton zig-zag STQ1 30 mm	800	30
1131100	Beton zig-zag STQ1 35 mm	800	35
1131105	Beton zig-zag STQ1 40 mm	800	40
1131106	Beton zig-zag STQ1 45 mm	800	45
1131110	Beton zig-zag STQ1 50 mm	800	50
1131111	Beton zig-zag STQ1 55 mm	800	55
1131115	Beton zig-zag STQ1 60 mm	800	60
1131118	Beton zig-zag STQ1 70 mm	800	70
1131120	Beton zig-zag STQ1 75 mm	800	75
1131121*	Beton zig-zag STQ1 80 mm	800	80
1131123	Beton zig-zag STQ1 85 mm	800	85
1131124*	Beton zig-zag STQ1 90 mm	800	90
1131125*	Beton zig-zag STQ1 100 mm	800	100

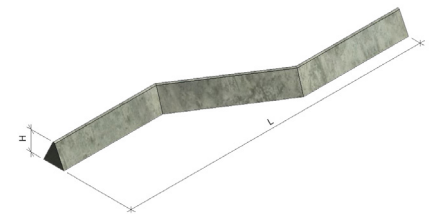

Remark:

*Not in stock

All designs of Concrete Zig-Zag spacers in HauCon's range can be produced in mix design StQ1 or StQ3+. A production time of 4 weeks must be counted for non-stocked types.

ENVIRONMENTAL CLASS

X0, XC1, XC2, XC3, XC4, XA1, XD1, XS1, XS2, XF2, XF3 XA2, XD2, XD3.

CE-MARKING

Concrete Zig-Zag is not subject to a harmonized standard and therefore does not have to be CE marked according to the Building Products Regulation No. 305/2011.

Note: We take reservations for typing errors and refer to the current version of data is always available at www.haucon.dk or can be requested by contacting the expedition. Current revision number is stated at the top left corner.