


## TECHNICAL DATA SHEET - HYDRA® SAM PRIMER

HyDra® Sam Primer is a colorless primer for the waterproofing membrane HyDra® Sam 1,5 Wall.

HyDra® Sam Primer can be applied to vertical and horizontal surfaces on all suitable mineral substrates.

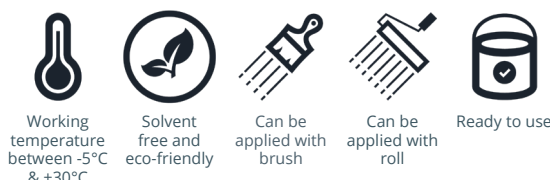

### APPLICATION

- Ensure that the surface is dry, even, clean, and free from any contaminating substances
- Chamfer the concrete edges and cover inside corners with a product such as RediRep 45
- HyDra Sam Primer is ready to use, and is applied with a brush or roll. The primer must be evenly distributed across the surface
- Mount HyDra Sam Wall 1,5 once the primer turns transparent. The primer must still be sticky (not wet) to ensure complete adhesion.

### TECHNICAL SPECIFICATIONS

Consumption*:	0,15-0,25 l/m <sup>2</sup>
Density:	1,0 kg/l
Drying time**:	45 min
Working temperature:	-5°C til +30°C

\* Based on a minimum consumption. Consumption depends on application method.

\*\* Drying time is based on +23°C and a humidity level of 50%.

### DELIVERY AND STORAGE

**Storage:** Frost free storage 12 months shelf life.

**Delivery:**

Bucket	5 L
Pallet	60 buckets

### PRECAUTIONS

- Newly applied HyDra Sam Primer must be protected from rain, frost, and direct sunlight until it's dry.
- Longer drying time if applied in cold weather with high humidity.
- Safety data sheet is available on [www.haucon.dk](http://www.haucon.dk).
- More information on waterproofing products can be found on [www.haucon.dk](http://www.haucon.dk).

### CE-MARKING

HyDra® Sam Primer is not subject to a harmonized standard and must therefore not be CE-marked according to the Building Products Regulation No. 305/311.

Note: We reserve the right to make printing errors. The current version of data is always available at [www.haucon.dk](http://www.haucon.dk) or can be requested by contacting our internal sales department. The current revision number is in the top left corner.