

TECHNICAL DATA SHEET - CONCRETE ZIG-ZAG SPACER

DESCRIPTION

Concrete Zig-Zag spacer is suitable for horizontal reinforcement and especially for rolling reinforcement.

The Zig-Zag spacer has a 2.5 mm galvanized wire embedded.

The narrow rounded edge can advantageously be turned downwards by casting visible concrete.

The wide edge is turned downwards by molding on a soft surface, eg insulation.


Concrete strength: > 60 N/mm²



For mix design requirements, use Concrete Zig-Zag in mix StQ3 + see more information here: <https://haucon.dk/produkt/beton-zig-zag-stq3/>

GEOMETRY

| Item no. | Description | Length (L) mm | Height (H) mm |
|----------|-------------------|---------------|---------------|
| 1131090 | Beton Zig-Zag 25 | 750 | 25 |
| 1131097 | Beton Zig-Zag 30 | 800 | 30 |
| 1131102 | Beton Zig-Zag 35 | 800 | 35 |
| 1131103 | Beton Zig-Zag 40 | 800 | 40 |
| 1131107 | Beton Zig-Zag 45 | 800 | 45 |
| 1131108 | Beton Zig-Zag 50 | 800 | 50 |
| 1131111 | Beton Zig-Zag 55 | 750 | 55 |
| 1131116 | Beton Zig-Zag 60 | 800 | 60 |
| 1131117 | Beton Zig-Zag 70 | 800 | 70 |
| 1131119 | Beton Zig-Zag 75 | 800 | 75 |
| 1131121* | Beton Zig-Zag 80 | 800 | 80 |
| 1131122* | Beton Zig-Zag 90 | 800 | 90 |
| 1131123* | Beton Zig-Zag 100 | 800 | 100 |

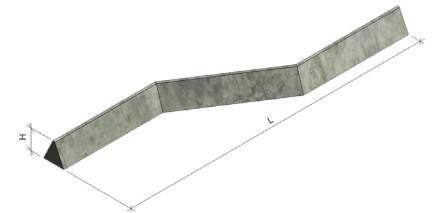

Remark:

*Not in stock

All designs of Concrete Zig-Zag spacers in HauCon's range can be produced in mix design StQ1 or StQ3+. A production time of 4 weeks must be counted for non-stocked types.

ENVIRONMENTAL CLASS

CE-MARKING

Concrete Zig-Zag is not subject to a harmonized standard and therefore does not have to be CE marked according to the Building Products Regulation No. 305/2011.

Note: We take reservations for typing errors and refer to the current version of data is always available at www.haucon.dk or can be requested by contacting the expedition. Current revision number is stated at the top left corner.