


TECHNICAL DATA SHEET - HYDRA® SAM PRIMER

HyDra® Sam Primer is a colorless primer for the waterproofing membrane HyDra® Sam 1,5 Wall.

HyDra® Sam Primer can be applied to vertical and horizontal surfaces on all suitable mineral substrates.

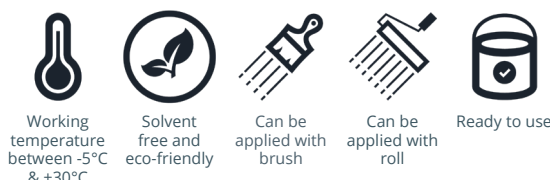

APPLICATION

- Ensure that the surface is dry, even, clean, and free from any contaminating substances
- Chamfer the concrete edges and cover inside corners with a product such as RediRep 45
- HyDra Sam Primer is ready to use, and is applied with a brush or roll. The primer must be evenly distributed across the surface
- Mount HyDra Sam Wall 1,5 once the primer turns transparent. The primer must still be sticky (not wet) to ensure complete adhesion.

TECHNICAL SPECIFICATIONS

Consumption*:	0,15-0,25 l/m ²
Density:	1,0 kg/l
Drying time**:	45 min
Working temperature:	-5°C til +30°C

* Based on a minimum consumption. Consumption depends on application method.

** Drying time is based on +23°C and a humidity level of 50%.

DELIVERY AND STORAGE

Storage: Frost free storage 12 months shelf life.

Delivery:

Bucket	5 L
Pallet	60 buckets

PRECAUTIONS

- Newly applied HyDra Sam Primer must be protected from rain, frost, and direct sunlight until it's dry.
- Longer drying time if applied in cold weather with high humidity.
- Safety data sheet is available on www.haucon.dk.
- More information on waterproofing products can be found on www.haucon.dk.

CE-MARKING

HyDra® Sam Primer is not subject to a harmonized standard and must therefore not be CE-marked according to the Building Products Regulation No. 305/311.

Note: We reserve the right to make printing errors. The current version of data is always available at www.haucon.dk or can be requested by contacting our internal sales department. The current revision number is in the top left corner.